




# RHEEMGLAS ELECTRIC STORAGE WATER HEATERS



ELECTRIC



DELIVERY



WARRANTY<sup>1</sup>



INSTALLATION



DUAL HANDED<sup>2</sup>

## FEATURES

- Fast, easy like-for-like replacement
- Feature dual handed inlet and outlet fittings<sup>2</sup>
- 50L, 80L and 125L models also provide T&PR fittings on both sides of the tank for an even easier installation
- Reliable vitreous enamel lining
- Small diameter – 385mm (25L), 400mm (50L), 480mm (80L & 125L)
- Twin Element models provide that little bit extra when you need it (160L - 400L)
- Models with a capacity of 125L or more suit connection to concessional (off peak) tariffs
- 7 year cylinder warranty<sup>1</sup>, including 3 years labour on cylinder



## WHY CHOOSE RHEEM

- Backed by over 70 years of Rheem water heating experience
- Capacities to suit every family size and hot water requirement
- Mains pressure water delivery for water that comes on steady, hot and strong!
- Full technical support through Rheem's National Service Network

**NOW  
DUAL HANDED**



2





# RHEEMGLAS ELECTRIC STORAGE WATER HEATERS

MODEL		25L	50L	80L	125L	160L	250L	315L	400L
Rheemglas® Single Element		111 025 111025/P <sup>†</sup>	191 050 191050/P	191 080	191 125	191 160	191 250	191 315	191 400
Rheemglas® Twin Element						192 160 <sup>3</sup>	192 250 <sup>4</sup>	192 315	192 400
Hot Water Delivery	Litres	18	50	80	125	160	250	315	400
Boost Capacity (twin element models)	Litres				-	45	50	50	90
kW Rating	1.8	✓	✓	✓	✓	✓	✓	-	-
	2.4	✓	✓	✓	✓	✓	✓	-	-
	3.6	✓	✓	✓	✓	✓	✓	✓	✓
	4.8	-	✓	-	-	-	✓	✓	✓
Relief Valve Setting	kPa	1400	1400	1400	1400	1400	1000	1000	1000
Expansion Control Valve (kPa)	kPa	1200	1200	1200	1200	1200	850	850	850
<b>Max Water Supply Pressure:</b>									
with ECV (kPa)	kPa	960	960	960	960	960	680	680	680
without ECV (kPa)	kPa	1120	1120	1120	1120	1120	800	800	800
Water Connections		RP <sup>3</sup> / <sub>4</sub> /20	RP <sup>3</sup> / <sub>4</sub> /20	RP <sup>3</sup> / <sub>4</sub> /20	RP <sup>3</sup> / <sub>4</sub> /20	RP <sup>3</sup> / <sub>4</sub> /20	RP <sup>3</sup> / <sub>4</sub> /20	RP <sup>3</sup> / <sub>4</sub> /20	RP <sup>3</sup> / <sub>4</sub> /20
<b>Dimensions</b>									
A	mm	390	695	945	1340	1610	1395	1640	1840
B	mm	385	400	480	480	480	640	640	690
C	mm	420	436	515	515	515	700	700	755
D	mm	130	397	702	1102	1332	1117	1317	1479
E	mm	116	142	64	64	104	73	113	121
F	mm	75	80	66	66	66	103	103	105
G - Twin element models	mm	-	-	-	-	1081	988	1228	1323
H	degrees	26	26	24	24	23	32	32	30
J	degrees	65	59	60	60	58	88	88	83
M	degrees	-	-	-	-	58	92	92	97
Approx. Weight (Empty)	kg	18	29	36	49	55	76	97	118
<b>Accessories</b>									
<b>Wall Mounting Bracket</b>									
Part No: 299120 (25L - 80L model only)									

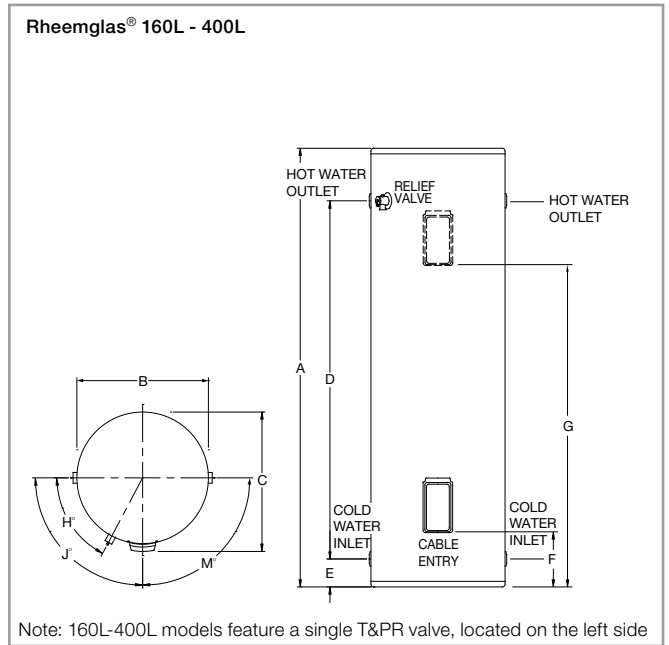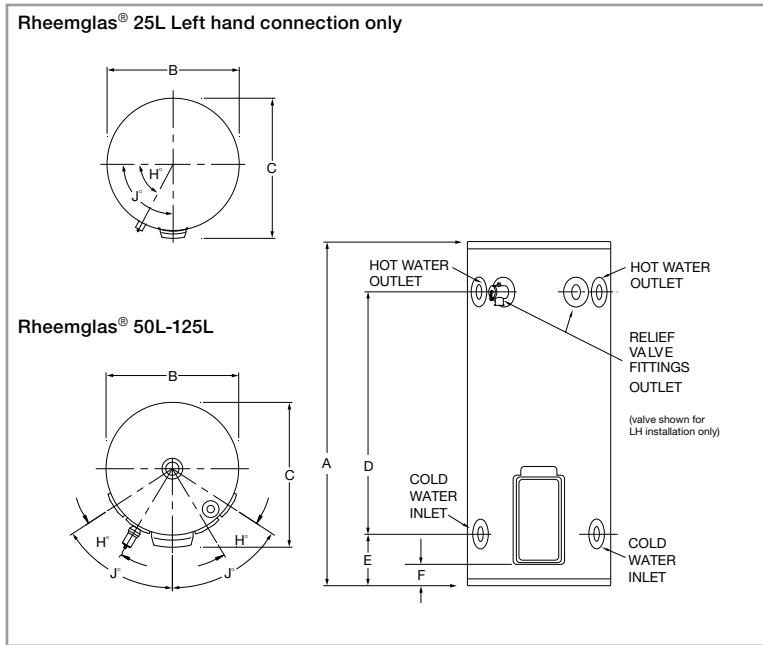

<sup>†</sup> Plug and lead model available in 2.4kW Rating only, suitable for indoor installation only

<sup>1</sup> Warranty: 7 Years on Cylinder, 3 Years Labour on Cylinder, 1 Year Parts & Labour warranty on all other components for Domestic (non-Commercial) installations. 7 year warranty applies to product manufactured after 1/1/2012.

<sup>2</sup> Excludes Rheemglas 25L models (Left hand only)

<sup>3</sup> Available in 3.6/3.0 element rating only

<sup>4</sup> Available in 3.6 & 4.8 element rating only

Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at [www.rheem.com.au/warranty](http://www.rheem.com.au/warranty)

<sup>\*</sup> Registered Trademark of Rheem Australia Pty Ltd. Materials and data are subject to change without notice.

Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia  
PO Box 6, Rydalmere, New South Wales 2116, Australia.

[www.rheem.com.au](http://www.rheem.com.au)  
Revised September 2013



RHEEM\_MKCT-BR-RD-LGELEC\_10/13